



DaVinci Fancy Shake™

INSTALLATION GUIDE

DaVinci Fancy Shake is a synthetic shake carefully engineered to provide the authentic look and durability of natural shake...at a fraction of the cost and weight. Special care has been taken to make the product easy to install. By following these instructions, and using good installation practices, you will be assured of a quality installation.


NOTE TO INSTALLER

DaVinci Fancy Shake offers a 7/16" thick profile, yet remains lightweight, because the shakes have an engineered rib structure on the back. When cutting shakes for open valleys or at overhangs such as eaves and gable ends, the core-out and ribbed support structure on the underside of the shake needs to be hidden by standard metal flashings.

Pay special attention to recommendations for accessories and installation at eaves (page 2), gable ends (page 4) and valleys (page 6).

JOB SITE READY!

DaVinci Fancy Shake is delivered to the construction site in bundles pre-collated with all three shake widths and all shake colors that make up the DaVinci Fancy Shake blend that is being installed. This pre-planned distribution produces the right aesthetic effect every time. Collated bundles also simplify installation and save time by eliminating hand sorting on the job site.



This information is provided for the use of professional roofing contractors. This Installation Guide does not supersede local building codes which should always be followed. DaVinci® Roofscapes does not warranty or have any responsibility for installation of its products. The DaVinci Roofscapes Lifetime Limited Material Warranty outlines its warranty responsibilities for the roofing materials it manufactures.

For questions about DaVinci Fancy Shake or its application, contact Westlake DaVinci Roofscapes, LLC
913-599-0766 or 800-DaVinci (800-328-4624) or www.davinciroofscapes.com

Please be sure to check DaVinci's website for updates. Installation Guide is subject to change without notice.

INSTALLATION

DECKING

DaVinci Fancy Shake must be installed on a smooth flat surface (plywood or OSB); minimum 15/32" APA approved plywood or 7/16" approved OSB. It is necessary that all previous roofing materials be removed prior to installation of DaVinci Fancy Shake. Imperfections in the decking may transmit through to finished roof. *Prior to installation over any plank type decking please see the [technical bulletin](#), RE: DaVinci & Installation Over Plank Decking, dated October 24, 2022 for possible concerns or warranty exclusions.*

DRIP-EDGE

Metal flashing is required on gable ends and eaves. An overhanging drip edge such as a Style "D" or Style "F" is recommended on gable ends to help mask the rib-structure on the underside. An overhanging drip edge may also be used on eaves although Style "A" or Style "B" drip edge are acceptable options.

ICE AND WATER SHIELD

(Severe Climate Underlayment in accordance with Chapter 15 of the UBC)

In areas where the average daily temperature in January is 25° F or lower or where ice buildup is possible, DaVinci requires ice and water shield be installed: from the bottom edge to two feet above the exterior wall line on all eaves, in all valleys, on all gable ends, and around all roof projections. In all cases ice and water shield is required in all valleys, regardless of average daily temperatures or the possibility of ice buildup.

UNDERLAYMENT

Method 1: Class A installation – One layer of MB Technologies TU-35 must be installed over the entire roof deck including areas with ice and water shield. No interlayment is required.

Method 2: Class C Installation – Areas of the roof deck not covered by ice and watershield must be covered with 30 lb non-perforated asphalt saturated felt meeting requirements of ASTM D 226.


GETTING STARTED

Use two corrosion-resistant nails in each shake near nailing location shown on the shakes. (See page 9). This includes the roofer's choice of: copper, stainless steel or hot-dipped galvanized nails. Once the starter is in place, begin installing shakes in the lower left corner (or lower right corner for a left-handed roofer).

The shakes should be flush with the starter tiles on the outer (rakes) and lower (eaves) edges. DaVinci recommends 3/8" gap between shakes.

Two methods of installation are available: Straight or staggered (see details below).

Use the alignment indicator at the top of each shake to help manage the exposure. An exposure of between 6" or 7" is acceptable for straight courses and between 6" and 7" for staggered courses. As you progress up the roof, be careful not to damage shakes already in place. Put something, perhaps a cut shake, under toe irons (scaffolding brackets) to avoid scratching or marring the finish of the shake already installed below.

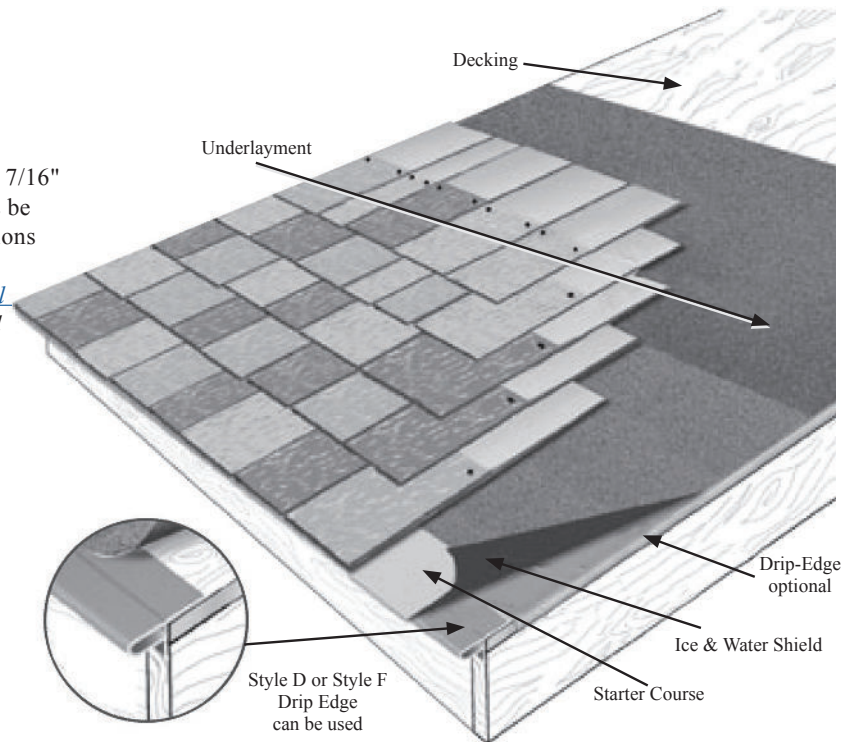

STARTER COURSE

Each starter tile should be installed extending past the drip edge by approximately 1". However, if using Style D or Style F drip edge, the starter shingle can be allowed to overhang less if it is appropriate for the gutter system. The starter tiles should be installed with the DaVinci logo on top. The starter tiles be spaced 3/8" apart as tiles will expand when warm. Each starter tile should be nailed with two nails on a line approximately 6" from the butt and 3/4" from outside edge.

INSTALLATION

STRAIGHT COURSING

Install the shakes one at a time starting in the lower left hand corner if right handed and lower right hand corner if left handed. The first course of shakes should be laid directly on the starter tiles. The shakes should be installed individually with two nails in the defined areas. The shakes should be laid as they come out of the bundle with a rack type system, also known as rack-style, stairstepping, or pyramiding; to prevent same size shingle directly on top of another. The shakes should be laid with a 3/8" gap between each shake. The gaps between shakes on adjacent courses should offset by a minimum 1 1/2". The use of the alignment lines on the shakes may be used to facilitate installation but chalk lines should be used frequently to assure horizontal alignment.

Chalk lines should be snapped on underlayment with the tips of the shakes following the lines. Do not snap lines on DaVinci Slate or use red chalk as the chalk may permanently discolor the shake.

STAGGERED COURSING

If the roof pitch is 6:12 or greater you may stagger the courses with a 7" exposure. The way this is accomplished is laying the shakes in 7" courses with every other shingle lowered 1". **Tiles can also be laid at 6" Exposure.**

An example of how to accomplish this is as follows:

Step 1: Lay the starter course across the eave and then put the first course of shake flush on top of the starter. Then snap a horizontal line 7" above the tips of the shakes you just installed or 25" from the eave line (butt of the shake you just laid).


Step 2: Now start laying your second course of shakes putting the tip of the first shingle you lay on the chalk line. The next or adjacent shake should be 1" below the line. The third shake should be on the line; the fourth shake should be below the line. This continues in the same pattern all the way across the roof one shingle tip on the line and the next 1" below the line. This continues in the same pattern all the way across the roof one shingle tip on the line and the next 1" below the line.

Step 3: Snap another horizontal line 7" above the line you chalked in Step 2 or 32" above the eave line. Start laying shakes as in step 2 with the first shake tip on the line and the next shake tip 1" below the line.


Step 4: Continue up the roof in this manner. Every course does not need to be chalked. As roofers begin to understand the concept, they can use alignment indicators to accomplish the stagger. We do, however, recommend occasional horizontal chalking to assure correct alignment.

Chalk lines should be snapped on underlayment with the tips of the shakes following the lines. Do not snap lines on DaVinci Fancy Shake or use red chalk as the chalk may permanently discolor the shake.


Straight Coursing on DaVinci Fancy Shake at a 7" Exposure
(Tiles can also be laid at 6" Exposure.)

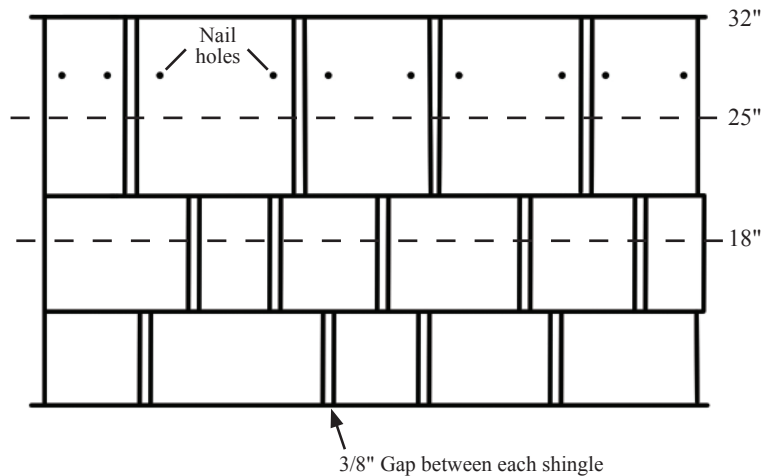

Staggered Coursing on DaVinci Fancy Shake at a 7" Exposure
(Tiles can also be laid at 6" Exposure.)

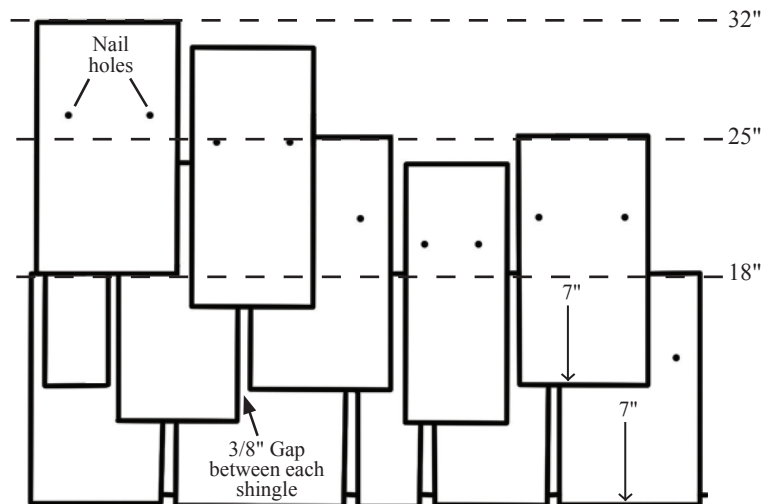

INSTALLATION

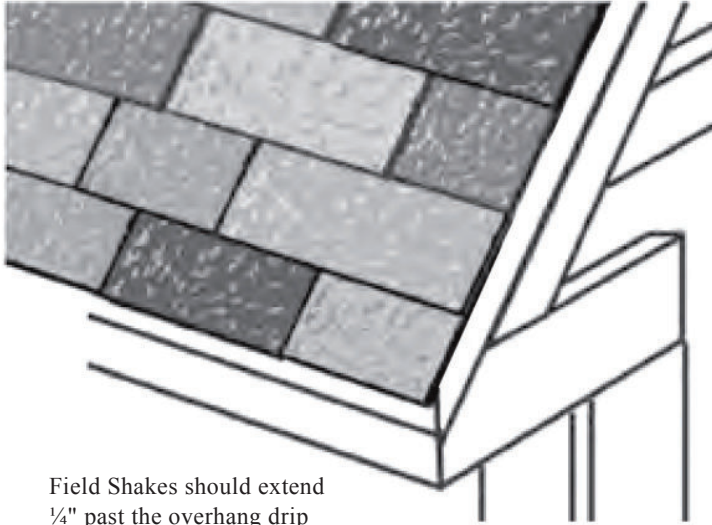

Field Shakes should extend ¼" past the overhang drip edge on gable ends (rakes).

GABLE ENDS / RAKES

When approaching the gable end of a course, it's always best to avoid cutting shakes. Cutting DaVinci Fancy Shake at gable ends can almost always be avoided by choosing from the three different shake sizes, and spacing between shakes. In the rare case when cutting is required, shakes should be cut so that the factory edge faces out on the gable end.

CUTTING

DaVinci Fancy Shake may be cut with a utility knife and straight edge. It may also be cut effectively with a circular saw. Carbide tooth blades are recommended for maximum blade life..



GAP

The recommended gap between slates is 3/8" with a minimum 3/16" gap required. The number of shingles per square for DaVinci Fancy Shakes is based on the assumption of 3/8" spacing between shakes. If spacing is less, more shingles per square will be required.


AVOID "CRACK ON CRACK"

The gap between two shingles in one course should always line up 1½" or more from the gap between two shingles in the course below.

Correct



Incorrect

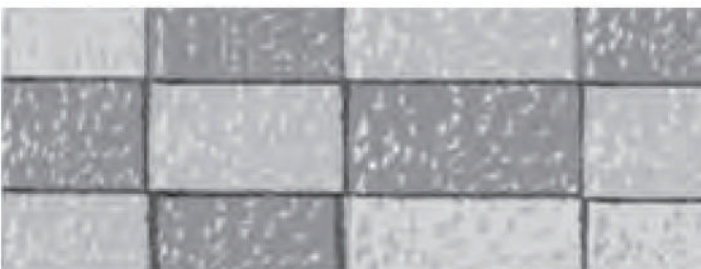

COLOR AND WIDTH VARIATION

DaVinci field shakes come in three width sizes: 12", 7" and 5". A four-inch shake is also available as an accessory. Each bundle contains a mixture of 30 shakes and includes a pre-collated assortment of widths and colors needed for each color blend. DaVinci Roofscapes® recommends that, if possible, shakes be applied as they come out of the bundles for the most pleasing aesthetic affect and to prevent "striping" and "patterning" on the roof. Keep in mind there needs to be 1½" side lap maintained and installation must be in a rack or pyramid style.

INSTALLATION

HIP AND RIDGE PREPARATION

After installing field shakes, hips and ridges should be prepared by installing a minimum 6" wide piece of non-corrosive metal or UV stable EPDM or equivalent over the hips and ridges. This metal or rubber should extend at least three inches from the center point on each side of the hip or ridge.

RIDGE VENT APPLICATION

If using a continuous ridge vent we recommend a rigid shingle roll-over type. When installing continuous ridge vent, care should be taken to insure joints in ridge vent are water tight. Once the continuous vent is installed, pre-packaged 6" DaVinci hip and ridge shakes should be installed in accordance with the standard hip and ridge installation instructions below. Special caution should be used when cutting the decking on the ridge to assure adequate nailing for the ridge pieces.

STANDARD HIP AND RIDGE INSTALLATION


There are two ways to start applying DaVinci Fancy Shake Hip and Ridge at the bottom of a hip. The first way is to install a double course of DaVinci Fancy Shake Hip and Ridge on the bottom of the hip. In this method the top portion of the under-shake should be cut so that it only covers the first course of field shakes. The second course is then installed without cutting. The tails of the shakes are left uncut and will project past the eave of the roof. Using a chalk line to assure straightness, the prepackaged 5" hip and ridge should be installed one piece at a time so that the butts of two shingles are adjacent and the inside edges touch. These shakes that make up a hip and ridge unit should be installed with a 6" exposure. DaVinci recommends using 5" units for hips and ridges unless continuous ridge vent is being used.

ALTERNATE HIP STARTER


The second method for starting a hip will involve mitering the first two shakes installed.

Step 1: Start by taking a single piece of DaVinci Fancy Shake Hip and Ridge and laying the butt of the shake with its corner at the corner of the hip and the butt flush with the eave of the house. Make a cut on the shake at the same angle of the hip. Cut a shake for the other side of the hip in the same fashion and press the two shakes tight together.


Step 2: The second set of shakes should be installed uncut with these outside edges pulled all the way down to the eave of the roof.

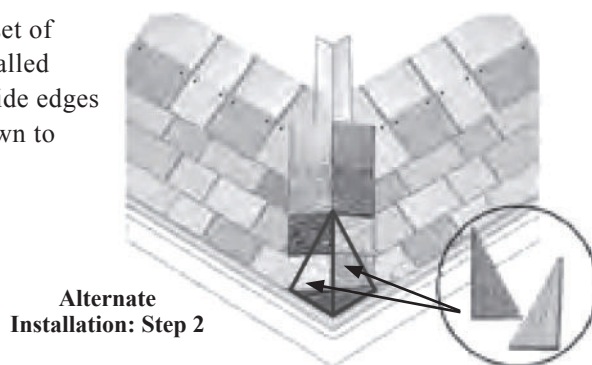

Standard Installation

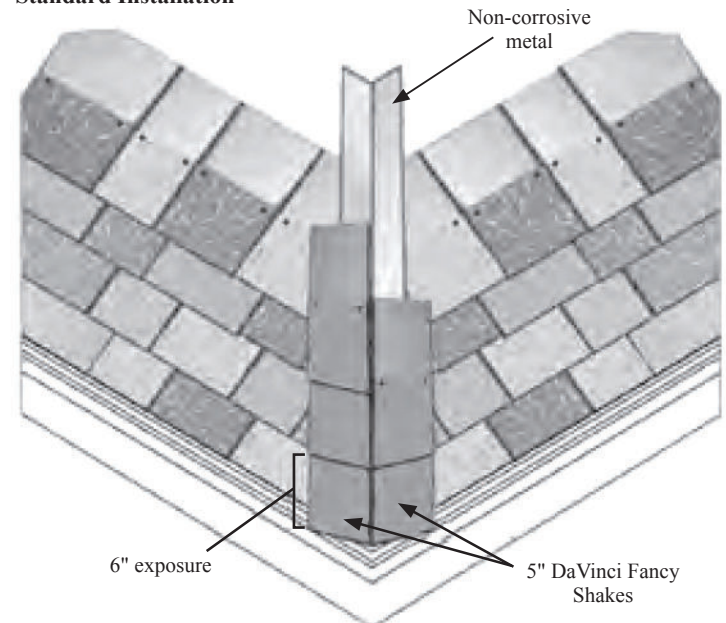

Alternate Installation: Step 1

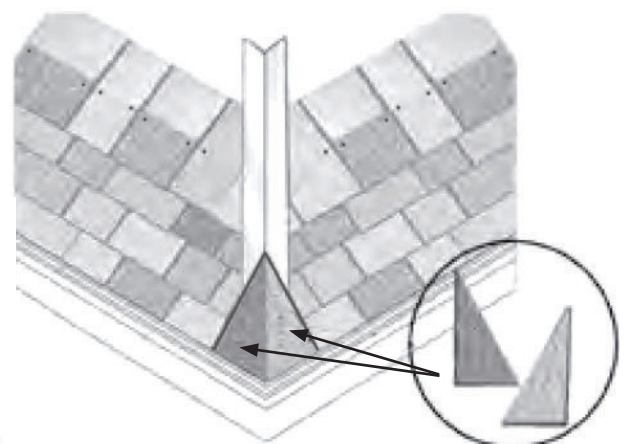

INSTALLATION

VALLEYS

Because DaVinci Shake has a rib-structure on the underside*, care must be used when installing DaVinci Shake in valleys. Open or closed valley systems may be used with variants of each system. Whether installing an open or a closed valley system, valley metal should be made from 24" stock of copper, minimum .019 aluminum, or minimum 28-gauge clad steel. DaVinci requires self-adhered membrane be used in all valleys.

*A 12" solid shake accessory tile is available.

DaVinci Valley Metal Options

- All metal valleys to be manufactured using 2' wide panels at a minimum.
- All returns are to be 1/2"
- All Shake Diverters minimum 1 3/4"

Open Valley Appearance Options



Open Valley Metal, Single Open, or Closed Diverter Metal: In many cases, with steeper pitched roofs, it is acceptable to install open valley metal or either type of single diverter valley metal and cut the tile on an angle parallel and 2 1/2" from the center or center diverter. Keep in mind that the cut rib structure of the tiles may be visible from the ground with some roof pitches.

Twin Diverter Open or Closed: Double open or double closed diverter metal can be used to provide an open valley appearance while also blocking the support ribs on the underside of cut tiles. This should be made from 24" stock that is broken in the middle without diverter to look like a "V". Additionally, there should be a closed or open diverter on either side of the center line. Shake should be cut and laid against the diverters on either side to mask the rib structure. This option will leave a visible portion of metal centered on the valley commonly 5-7" wide.

DaVinci offers 12" solid tiles if the rib structure or open area under DaVinci shakes is a concern.

Closed Valley Appearance Options

Single Open or Closed Diverter: In many cases, with steeper pitched roofs, it is acceptable to install a single open or closed diverter valley. The shake tiles are then cut appropriately in order to lay near the center diverter. This option will only leave a small seam or crown of the diverter visible and resembles a closed valley.

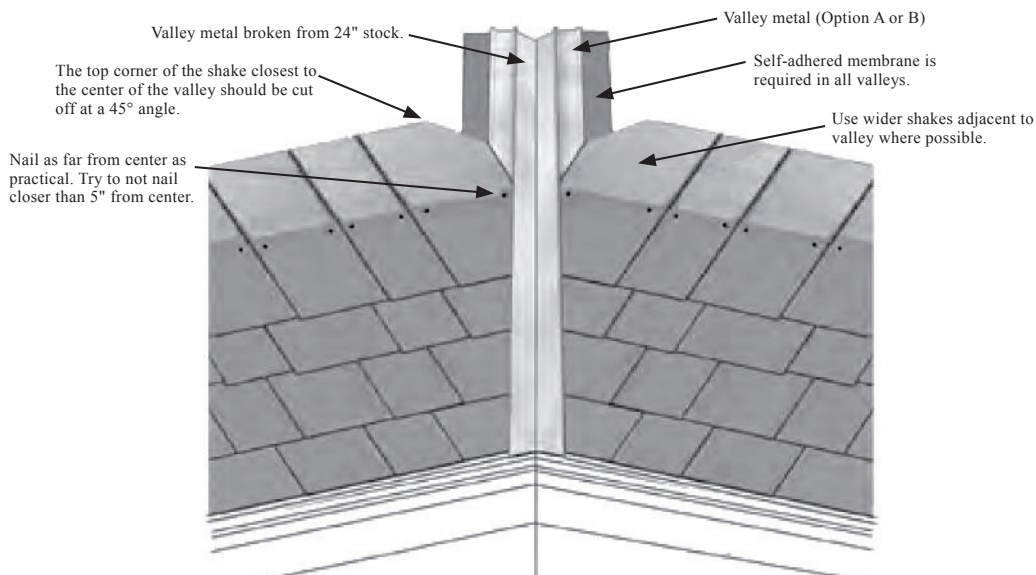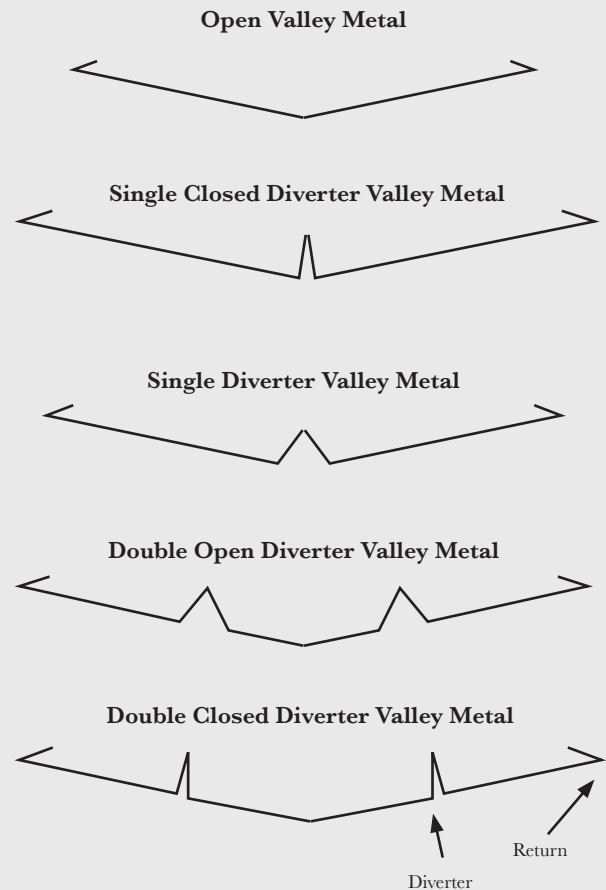


SPECIAL ISSUES

FLASHING

Flashing should be used in all areas in which the roof abuts a vertical wall, dormer, chimney, skylight or other structural protrusions.

Use the step flashing method, with copper, a minimum of 28-gauge clad steel, or aluminum. The flashing should extend 4" up vertical walls.

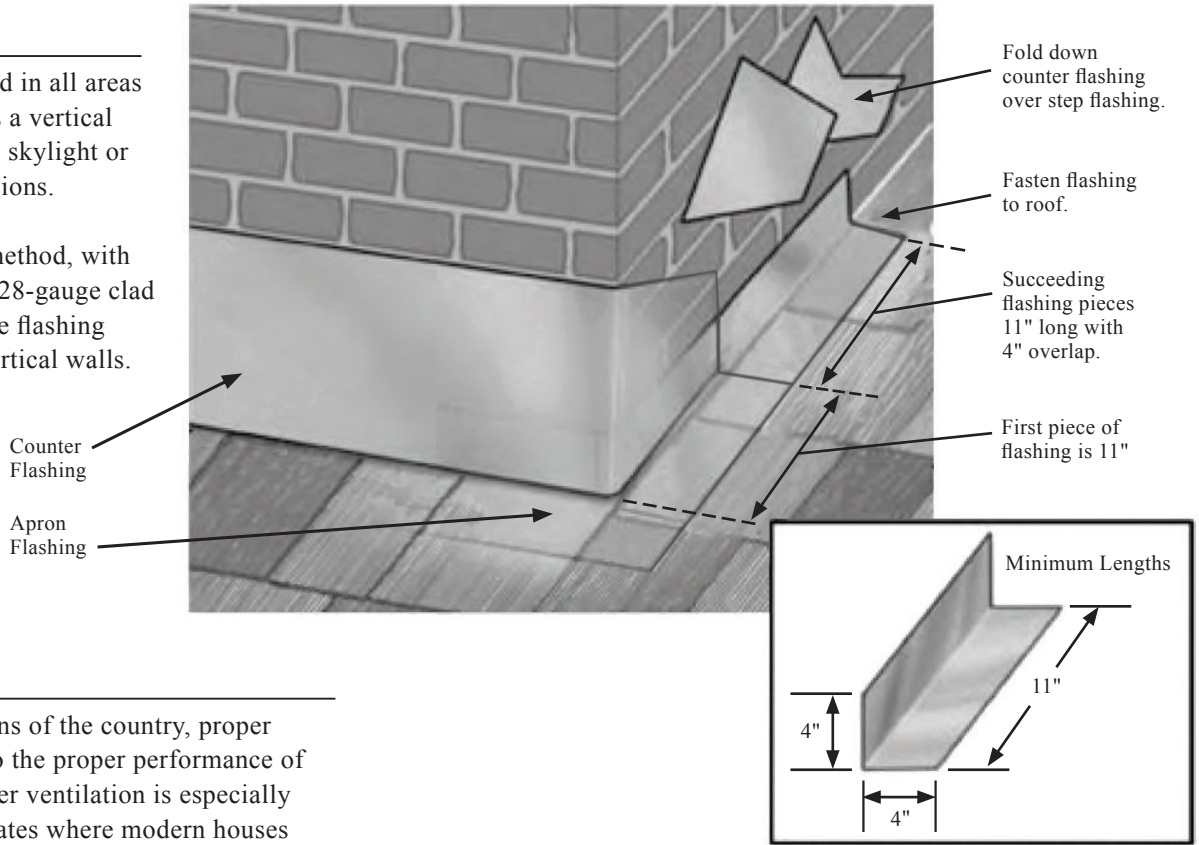


VENTILATION

In some climatic regions of the country, proper ventilation is crucial to the proper performance of a roofing system. Proper ventilation is especially important in cold climates where modern houses are well insulated and weather-tight. We suggest you follow standard building practices in your area and meet all national and local building codes. A continuous ridge vent is an especially effective ventilation system that we highly recommend.

SNOW GUARDS

Snow guards should be considered in all geographic areas where accumulating snow fall is possible. Most kinds of brass, copper, or clad aluminum snow guard systems work well with DaVinci. Rocky Mountain Snow Guards, Inc. is good source for further information about snow guards. Contact them at www.rockymountainsnowguards.com or call 877-414-7606. It is recommended that snow guards be installed during the installation of the DaVinci roof although retro-fit snow guards are available for previously installed DaVinci roofs. Details regarding installation remain the responsibility of the installer and the customer.

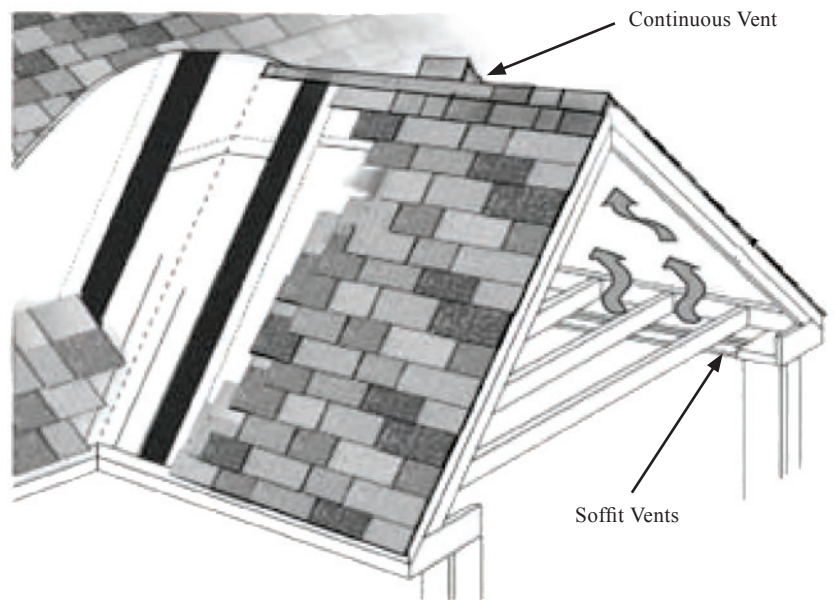

For additional information please see Q & A Guide to Snow Guards at http://www.davinciroofscapes.com/document-download/?document_id=91.

Consult with your local contractor to determine if snow guards would be appropriate for your project. DaVinci makes no representations or warranties about the propriety of snow guard installation on any given project. Rather, the decision to install snow guards rests solely with the end user.

PRODUCT FEATURES

EXPOSURE

With DaVinci Fancy Shake, the allowable exposure depends on two factors:

1. Roof Pitch
2. Whether the shakes are laid staggered or straight

ROOF PITCH	COURSING	EXPOSURE
Less than 2:12	Not Recommended	
* 2:12 to 4:12	Straight or Staggered	7"
4:12 or greater	Straight or Staggered	7"

* For slopes between 2:12 and 4:12, an ice water shield is required over the entire area.

NAILING

Each shingle should be applied with two copper, non-corrosive stainless steel, or hot-dipped galvanized 3/8" head x 1½" length nails. Minimum 3/8" head is required. Shakes can be nailed by hand or with a pneumatic nail gun. Don't overdrive nails or nail at an angle. Keep the nail head flush with the surface of the shingle to avoid creating "craters" which can collect moisture and can also prevent the exposed end of the shingles from laying flat. Ring-shank nails are optional for plywood, but must be used for OSB decks and in high wind areas.

Use these alignment guides with the top edge of the previous row of shakes to control the exposure.


CUTTING

DaVinci Fancy Shake can be cut with a utility knife and straight edge. Electrical circular saws (carbide blade, two teeth per inch) or cordless circular saws (a minimum of 18 volts is recommended) may also be used.

NATURAL APPEARANCE

To produce the most natural and realistic appearance, DaVinci Fancy Shake is modeled to reflect machine-sawn shingles. Scientifically engineered, reinforcing ribs on the back of the shingle add stability and strength.

Please note: DaVinci Fancy Shake is made flat, should be stored flat, and must not be installed unless it is flat and in its original form. If shakes are not stored flat and become twisted or curled, lay them flat in a warm place and they will return to their original flatness. Damaged shingles should never be installed.

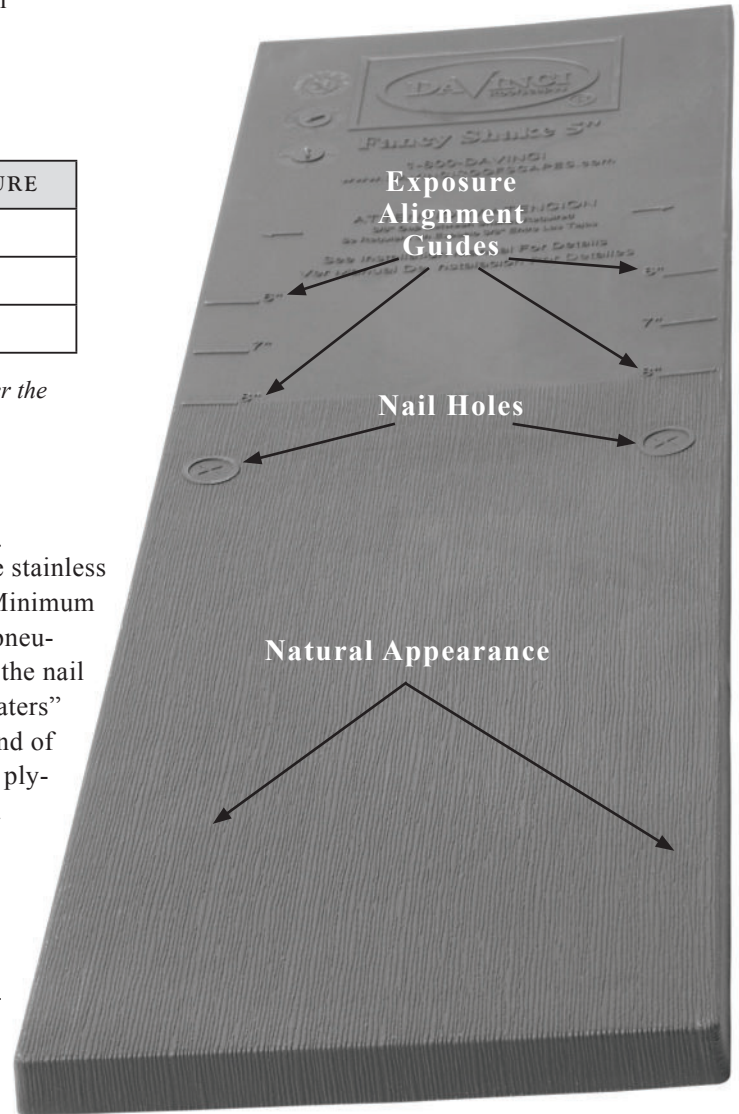

QUICK REFERENCE

ISSUE	DAVINCI RECOMMENDS	ACCEPTABLE ALTERNATIVES
Valley	Copper	28-gauge clad metal
Flashing	Copper	28-gauge clad metal
Eaves Flashing	Copper	28-gauge clad metal
Nails	Non-Corrosive Stainless Steel	Hot-dipped Galvanized

For questions about DaVinci Fancy Shake or its application, contact Westlake DaVinci Roofscapes, LLC 913-599-0766 or 800-DaVinci (800-328-4624) or www.davinciroofscapes.com

Please be sure to check DaVinci's website for updates. Installation Guide is subject to change without notice.